


Table of Content


Table of Content	1
Safety Precautions	2
Conformity	5
Data Protection	6
Listening Cautions.....	7
Support	8
Appropriate use.....	9
Cleaning.....	9
Feature Summary	10
Accessories.....	10
Buttons & Ports	11
Charging Battery	13
Installing Memory Card	14
Transferring Files	16
Turning On/Off.....	18
Screen Lock	18
Home Screen	19
Using the Touch Screen	23
Bluetooth Connection.....	25
Access Internet - Wi-Fi.....	26
Virtual Keyboard.....	30
Using the Web Browser.....	31
Photo Playback	34
Manage Third-party Applications	36
System Settings	38
Troubleshooting.....	43
Specifications	46
License conditions.....	49
Warranty Conditions.....	50


Safety Precautions


- Do not subject the device to severe impact or drop it from heights.
- Do not use the device in extreme hot or cold, dusty or damp conditions. Do not expose it to direct sunlight.
- Avoid using the device near strong magnetic fields.
- Keep the device away from water and other liquids. In the event that water or other liquids enter the device, power off the product immediately and clean the device.
- Do not use chemicals to clean the device in order to avoid corrosion. Clean it with a dry cloth.
- We are not responsible for damage or lost data caused by malfunction, misuse, modification of the device or battery replacement.
- Do not attempt to disassemble, repair or modify the product. This will invalidate the warranty.
- If the device will not be used for an extended period of time, please charge the battery at least once per month to maintain battery life.
- Charge the battery if:
 - a) The battery level icon displays  (An empty battery)
 - b) The device powers off automatically when restarted.
 - c) There is no response when pressing keys with keys unlocked and battery full.
- When the device is being formatted or transferring a file, do not interrupt the connection. Otherwise, data may be corrupted or lost.
- Please use and install data using the attachments/accessories provided and only according to the manufacturer's instruction.
- Please refer to the information on the bottom of the device for electrical and safety information before installing data or operating the device.
- To reduce the risk of fire or electric shock, do not expose this device to rain or moisture. The device should not be exposed to dripping or splashing. Never place objects filled with liquids, such as vases, on the device.
- There is danger of explosion if the battery is replaced incorrectly. Replace only with the same or equivalent type.

- The battery (battery or batteries or battery pack) should not be exposed to excessive heat such as sunlight, fire or the like.
- Please follow responsible procedures for battery disposal.
- If the power adaptor is disconnected from the device, the device will remain operable as long as the battery has sufficient charge.
- The power adaptor is a CLASS II apparatus with double insulation and no external ground is provided.
- Safety symbol explanation:



 The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of non-insulated “dangerous voltage” within the product’s enclosure that may be of sufficient magnitude to constitute a risk of electric shock.

 To reduce the risk of electric shock, do not remove the cover (or back) as there are no user-serviceable parts inside. Refer servicing to qualified personnel.

 The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance instructions in the literature accompanying the device.

- Do not leave the device on in a confined space such as a book case or similar. The ventilation should not be impeded by covering the ventilation openings with items such as newspaper, table-cloths, curtains, etc.
- No open flames, such as lighted candles, should be placed on the device.
- Use the device in moderate climates.
- Never disconnect the USB cable from your e-book reader to the PC during a data transfer or formatting. Correctly disconnect the device from the operating system. Information loss and malfunctions can occur.

**Note**

Please only charge the battery while the device is turned off. The charging time will be shorter and the lifetime of the battery will be enlarged. Please fully charge the battery before first use.

**Note**

Please note that the internal battery can only be replaced by qualified personnel.

If necessary please contact to the ODYS customer service at www.odys.de.

**Disposal**

Correct disposal of this product. This marking indicates that this product should not be disposed of with others household waste in the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To dispose of your used device, please use the return and collection systems available in your area or contact the retailer where the product was purchased. They can take this product for safe environmental recycling.

Conformity



We, Axdia International GmbH, hereby declare that this Android Tablet corresponds to the basic requirements and relevant regulations outlined in guideline 2014/53/EU, 2014/30/EU, 2014/35/EU.

The CE declaration of conformity for this product may be found on the following link:

<https://www.odyshilfe.de/konform>

Please note the following for the regulations on the use of the 5GHz WLAN within the EU:

This device is suitable for operation in the following European countries: Germany, Belgium, Netherlands, Luxembourg, Austria, Switzerland, France, Spain, Portugal, Italy, Greece, Norway, Sweden, Finland, Denmark, Liechtenstein

Within the European Union, operation of the WIFI function in buildings is not restricted. Operation outside of buildings is restricted.

Data Protection

Basically, this device can be used without providing information about personal data to the Axdia International GmbH company. Your data will only be collected after you have contacted us by e-mail, telephone or via our website.

In these cases, our privacy policy applies, which you can view at <http://datenschutz.axdia.de/>.



Note

Please note that if required to assert a warranty claim based on our warranty terms, your information will be collected and used solely for our purposes, based on our Privacy Policy mentioned above.



Important!

This device can be linked to a Microsoft or Google™ online account, depending on the model. In addition, the device may install and use third-party programs, apps or websites that may require the use of personal data for their use. In these cases, the privacy policy of the respective provider apply.

Axdia International GmbH cannot be held responsible or liable for the collection and use of this data. Please contact the provider if you have any questions about the use of your data.

Listening Cautions



Hearing Safety

Listen at a moderate volume.

Using headphones at a high volume can impair your hearing. This product can produce sounds in decibel ranges that may cause hearing loss for a normal person, even for exposure less than a minute. The higher decibel ranges are offered for those that may have already experienced some hearing loss. Sound can be deceiving. Over time your hearing 'comfort level' adapts to higher volumes of sound. So after prolonged listening, what sounds 'normal' can actually be loud and harmful to your hearing. To guard against this, set your volume to a safe level before your hearing adapts and leave it there. To establish a safe volume level: Set your volume control at a low setting. Slowly increase the sound until you can hear it comfortably and clearly, without distortion. Listen for reasonable periods of time: prolonged exposure to sound, even at normally 'safe' levels, can also cause hearing loss. Be sure to use your equipment reasonably and take appropriate breaks. Be sure to observe the following guidelines when using your headphones. Listen at reasonable volumes for reasonable periods of time. Be careful not to adjust the volume as your hearing adapts. Do not turn up the volume so high that you can't hear what's around you. You should use caution or temporarily discontinue use in potentially hazardous situations. Do not use headphones while operating a motorized vehicle, cycling, skateboarding, etc.; it may create a traffic hazard and is illegal in many areas.

Support

<http://www.odys.de>

support@odys.de

On our website you will find the latest information about this product, other products of our enterprise, our company itself and valid warranty terms. The latter you will find under Service - Downloads. Firmware upgrades for this device are also offered on our website. For questions or problems read our FAQs on our website or contact our after sales service.

The product includes software components licensed under GNU General Public License (GPL). If you would like to receive more information about the appropriate source code, please refer to our Service Center.

Manufacturer

Axdia International GmbH Formerweg 9 D-47877 Willich (Germany)	Tel: +49(0) 2154 / 8826-0 Fax: +49(0) 2154 / 8826-100 Web: www.axdia.de E-Mail: info@axdia.de
--	---

Appropriate use

Device is designed for playing music and video files in commonly used formats, showing photos and access internet functions using the built in Wi-Fi function. The use is designed on the usual Usage and service life of consumer electronics of this kind in the home.

It is exclusively meant for this purpose and must only be used for the same.



Please note

This also includes paying attention to all information contained in this operating manual, especially in the safety instructions. Any other usage is considered to be improper and may lead to material damages and even personal injuries. Moreover, it will result in the immediate loss of guarantee. The manufacturer does not bear any liability for damages caused due to improper use. This manual may not reflect your actual device's operation. All information is subject to change without prior notification. Please follow your actual device's operational procedures.

Cleaning

- Please only clean the device using a cloth.
- Please don't use any chemicals or solvents.

Feature Summary

Wi-Fi Connectivity

With the latest Wi-Fi technology, this device can connect you to the Internet wherever you are.

Touch Screen

Touch or slide your finger on the screen, the screen responds instantly.

Third-party Application Support

With the built-in OS, you can install a large number of third-party applications in this device.

Please note that you need to insert a Micro SD-Card for it.

Built-in G-sensor

The screen changes to landscape or portrait automatically when the device rotates.


Entertainment

You can enjoy music, movies, pictures and e-books with the Mobile Tablet.

Accessories

- USB Cable
- Power Adaptor
- Quick start guide

Buttons & Ports

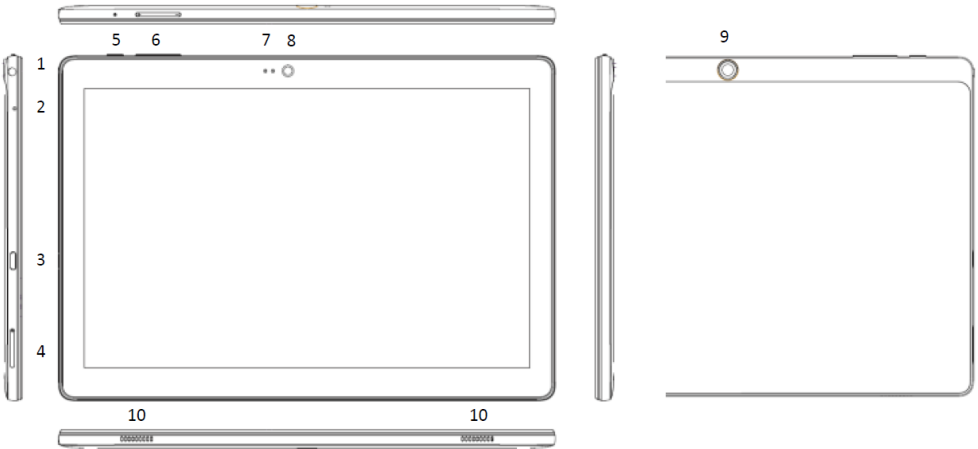

1. Headphone jack

Sound output for headphones.

i Note

The built-in speaker is autom. deactivated when a headphone is connected.

2. Microphone 3. USB-C port

Charge and power the tablet with the included power adapter.

Support for USB stick, surf stick, Keyboards and Mouse.

i Note

An OTG supporting adapter cable is required (optional).

! Please note

Only use connecting cable with a maximum length of 80cm

4. Hybrid slot

Compartment for inserting 2x Nano SIM cards or 1x Nano SIM and 1x Micro SD card for standard Micro SD and Micro SDHC memory cards up to 265GB (FAT32)

5. Power button

Press and hold the [Power] button to turn on or off the device; briefly press the button to turn the screen on or off. Long press (15 sec.) to turn off the device if it freezes or behaves otherwise abnormally.

- 6. Volume key +/-** Press briefly to increase / decrease the volume level.
- 7. Brightness sensor**
- 8. Front camera** Front-facing camera for taking pictures
- 9. Rear camera** Rear-facing camera for taking pictures or videos.
- 10. Speaker**



Tip

Simultaneously press the On/Off key and the Volume-Minus-Key together for 2 seconds to take a screenshot of the current view.

Charging Battery

The device has a built-in rechargeable battery. No extra battery installation is required. Just charge the device when it indicates low battery.

To charge the battery, connect the device to any standard wall outlet via the DC-IN port using the power adaptor. It takes about 5 hours to fully charge the battery. Charge the battery before first use.



Please note

- a. We advise to use only the delivered power adapter with this tablet.
- b. You can operate the device even when it is being charged. But for extended battery life, it is suggested NOT to use the device when it is charging.
- c. Pay close attention to the charging time. Charging too long may cause damage to the battery. Never charge the device unattended overnight.
- d. The ideal operating and charging temperature lies between 15°-25° C.
Long-term use outside of this range may affect the device's lifespan.
- e. Avoid direct sunlight and keep away from heat sources such as heaters, ovens or stoves. Do not leave unattended in vehicles.
- f. The device may become warm while in operation or during charging. Therefore, we suggest placing the device on a heat-resistant surface.
- g. For maximum performance, lithium-ion batteries need to be used often. If you don't use the device often, be sure to recharge the battery at least once per month.
- h. Should the rechargeable battery of the device discharge completely, connect the device to the main power source for approximately 5-10 minutes before attempting normal operation.


Installing Memory Card



Please note

Always switch off the device before inserting the cards. Otherwise the cards cannot be recognized.

- Hold the unit with the camera facing up.
- Turn the unit over so that the screen is facing down and place it on a soft surface if necessary. The card slots are now located on the right side of the device.
- ① Use the included opening tool and insert the pointed end into the opening provided on the card slot.
- ② Now insert the cards as shown. Make sure that the cards are aligned correctly. The contacts must point upwards towards the back of the device.
- The card and card reader may be damaged if the cards are not inserted correctly.
- Close the compartment by gently pushing it back into the slot. Make sure that the cards you are using are in the correct orientation and straight so that they do not jam when inserted.
- To remove or replace the cards, follow the same procedure.
- To view the files on the card, call up the Explorer by touching the Explorer icon and selecting the "SD Card" directory.

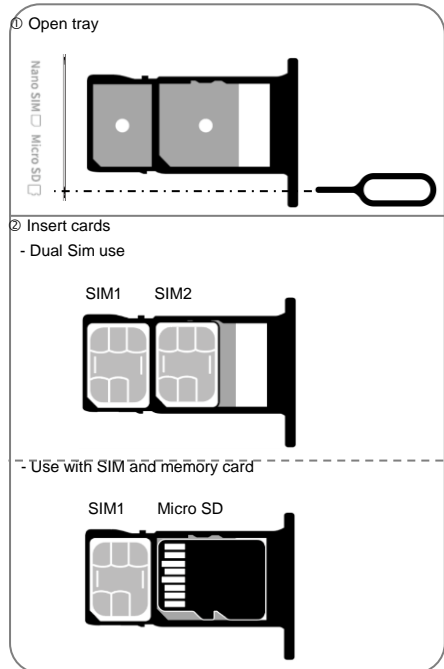

**Please note**


We recommend using only Micro SD or SDHC cards up to 256GB capacity.

When a Micro SD card is inserted in or ejected from the device, it may take few seconds for the device to update the content. Please avoid inserting or ejecting Micro SD card when other operation is running as this may cause the system hang. Do NOT remove the card if the content inside the card is being played.


Transferring Files

Before reading or playing files, you need to transfer media files from a computer to the device.


1. Connect the device to a computer with the supplied USB cable.
2. After connection, the connection is displayed as a notification at the top of the device.
3. Open the notification bar. Tap the Notification button for more information.

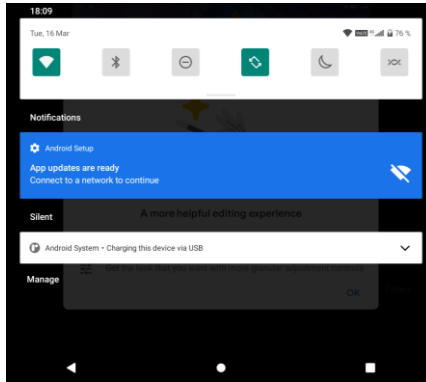

4. Tap again to open the USB settings.

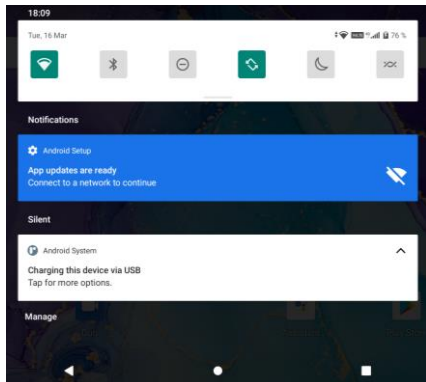

5. Activate the data transmission here.

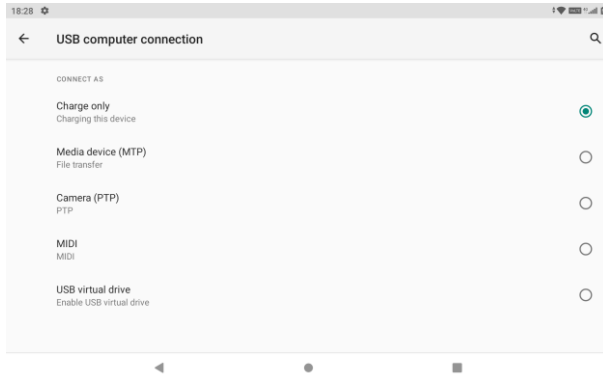

6. The internal memory and a memory card, if inserted, are now available via the Explorer of a Windows PC, for example. Now you can copy files to or from this drive.
7. To end this action, disconnect the device from the computer.



Please note

The pre-installed applications and OS occupy a considerable part of capacity – nearly more than 1GB, it is normal that you see huge difference between available memory space and total capacity.

Turning On/Off

To turn on the device

Press and hold the **Power** button until you see the boot-up screen then release. It may take a few minutes to start up the system, please wait before you proceed.

To turn off the device

Press and hold the **Power** button until you see the option “Power Off”, tap on “Power Off” and then tap on “OK”.



Tip


This device will sleep with the screen off if it stays inactive for a few seconds. You can briefly press the **Power** button to turn on the screen and wake it up.

Screen Lock


The screen automatically turns off and locks itself after a set period of time.

When the screen turned off, press the **Power** button to light up the screen.



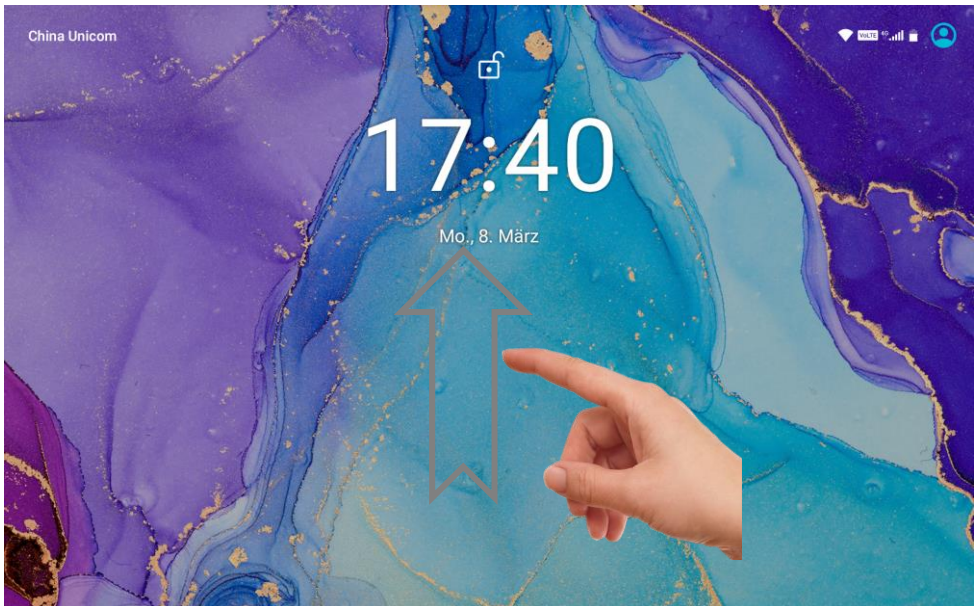

To unlock, push the lock symbol upward.

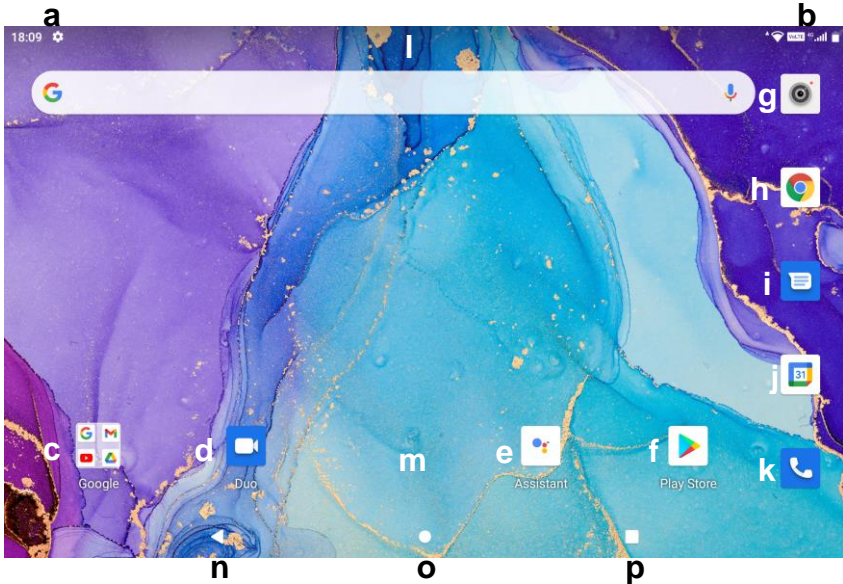

Home Screen



a. System hints	Informs the user if attached memory or updates are available and also provides other system status information.
b. System settings	System data such as WLAN and battery status as well as the current time are displayed here. Drag the status bar for further settings at this location down.
c. Google apps	You can access the various Google Apps
d. Google Duo	A Google program for video calls for Android and iOS.
e. Google Assistant	Just say “Hey Google” or press and hold the home button.
f. Google Play	Download thousands of apps on Google Play.
g. Camera	Open the camera.
h. Browser	Tap to launch the Browser Chrome to visit your favorite websites.
i. SMS Service	Read and manage the SMS messages.
j. Calendar	To show the calendar.


k. Phone functions	Make phone calls, manage your calls and contacts.
l. Google Search Bar	Search through Google Online for everything you want to know. 
m. Search apps	Overview of your apps. Drag from the bottom to the top to get an overview of your apps.
n. Back soft key	Tap to return to the previous screen. If the keyboard is on the screen, tap to close the keyboard.
o. Home soft key	Tap to return to the home screen.
p. Ongoing application	Display of all main applications currently running in the background.
 Menu soft Key	Tap to view the option menu  Note When you Tap the Menu key from within an application, you will see the options for that application. But you will not see them on start screen.  Caution Some apps may show this icon at the top right corner.

Status bar areas

The status bar at the top of the screen is divided into two areas.


1. System hints

Wipe from the upper edge towards the centre to open the bar. Status information and system messages are displayed.

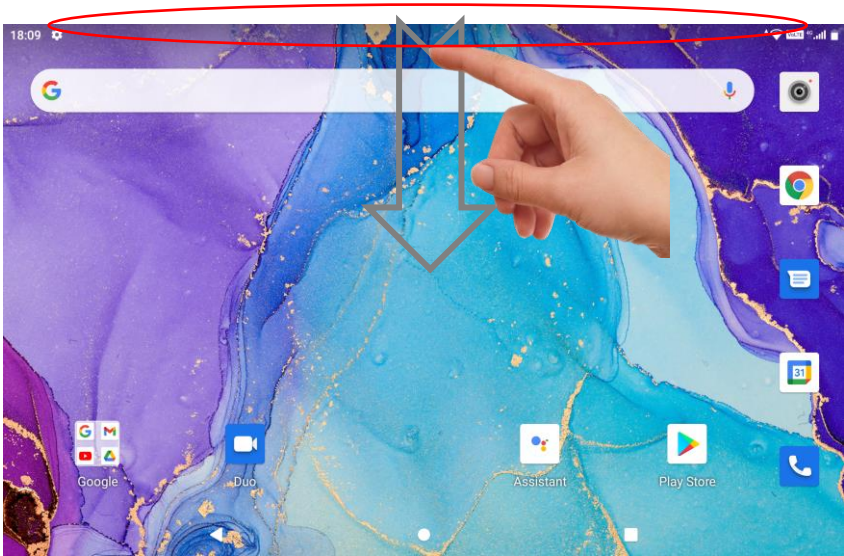

2. System settings (Short select)

Wipe the screen top down again to provide direct access to the most important system settings. System information's like Wi-Fi, battery status and the current time will be shown here.

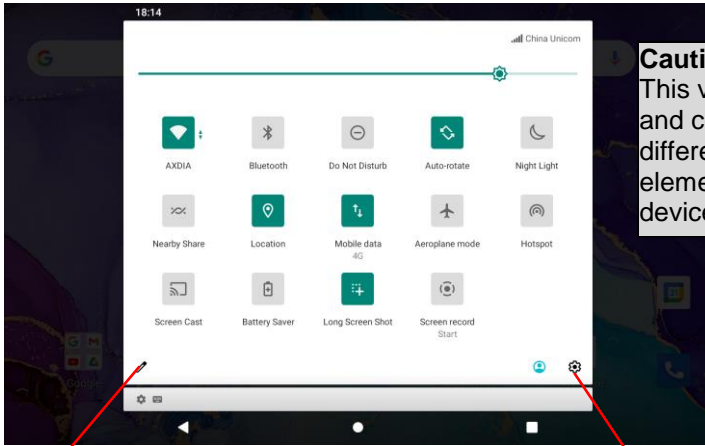

Caution!

This view may vary and could show different or less elements at your device.

Change the quick dial elements

Open the settings

Applications

The device supports most of popular third-party applications. It has many useful applications pre-installed, such as music player, video player, photo viewer, alarm clock, calculator, etc.

Furthermore, you can add more applications to the device by installing them manually.



Please note

Installed on this unit are various third-party applications (Apps), whose author is not Axdia. All rights and obligations remain the sole responsibility of the author of these applications. Axdia accepts no liability for any malfunction of third-party apps.

For support or license inquiries please contact the respective owners directly.

Contact information may usually be found within the application.

Using the Touch Screen




This device is equipped with a touch-screen. Following are a few tips on how to use the touch screen.



Tip

For a proper usage please use your finger.

Main Touch Screen Actions

- In many applications, you can go back one level in the interface by tapping on the back icon  (see below center of the screen).
- Wherever you are in the interface, you can go back directly to the home screen by tapping on the home icon  (see below center of the screen).
- Tap on  to display the recent opened applications. Wipe the bar left or right to search for running programs. Tap the program to open it. Swipe upwards to close a single program.
- Tap at “Clear all” to clear the list.



Please note

The shown applications run in the background. Thereby system resources are used, which reduces the battery runtime.

Other Touch Screen Actions

- When watching a video or listening to music, you can tap the progression bar to go directly to a different location in the video or song. You can also use your finger to drag the cursor in the progression bar to another location in the video or song.
- In the file browsers (File, Music, Video, Photo, etc.), you can drag your finger up and down to scroll the file list up and down.
- In the Web browser, you can scroll up and down by tapping on the page and dragging it up or down (be careful not to tap a link until you are ready!).
- Tap the link to open the page.



Please note

DON'T use a pen or pencil or other sharp items to tap on the screen! This may damage the screen. DON'T place heavy or sharp-edged items on the screen. Clean it carefully with a soft cloth. DON'T use cleaner.

Bluetooth Connection

Your tablet is equipped with an integrated Bluetooth technology to enable your device be connected with other Bluetooth devices such as other tablets, mobile phones, headsets or Bluetooth keyboards.

Pair other devices

- (1) Drag from the button to the top on the home screen and touch the icon for „Settings“.
- (2) Tap on “Connected devices”, “Connection preferences” and “Bluetooth” and if necessary activate the function by tapping on “Off”.
Bluetooth is “On” will be displayed.
- (3) Select the device that you want to pair from the list.
- (4) Follow the pairing wizard. You may have typed on both or only one of the devices for a PIN code.



Please note


The device is only visible as long as the Bluetooth settings are active. When exiting the menu, the visibility is disabled. Depending on the device, another procedure code can be applied. For some devices, you will find a four-digit pin number in the manual of this device. Newer devices will be shown the code to be used on one or both devices.



Notice

The Bluetooth status and received data is displayed at the top bar.

Advanced setting

To access the advanced settings, first press the menu button () at top right.

It enables you to refresh the device list, to change the Bluetooth name or to display files received via Bluetooth.

Access Internet - Wi-Fi

Your tablet features built-in Wi-Fi technology so that you can access the internet via Wi-Fi network.

First of all, you need to configure a Wi-Fi network. For the Wi-Fi configuration procedure to work, you need to be in a Wi-Fi zone that will allow you to connect to it. Every time your tablet is in range of a network that you have already configured once, it will attempt to make a connection.



Please note


In order to establish a Wi-Fi-connection it is required to know the encryption password of the desired Wi-Fi network.

Be sure that you are allowed to use this network and that no other settings of this network like MAC address filter will deny the connection.


The MAC Address of your device can be found at: "Settings" – "About the Tablet" – "Wi-Fi MAC address".

Manual WIFI Configuring


1. In the apps list, tap on the Settings icon.
2. Tap on “Network and Internet”.

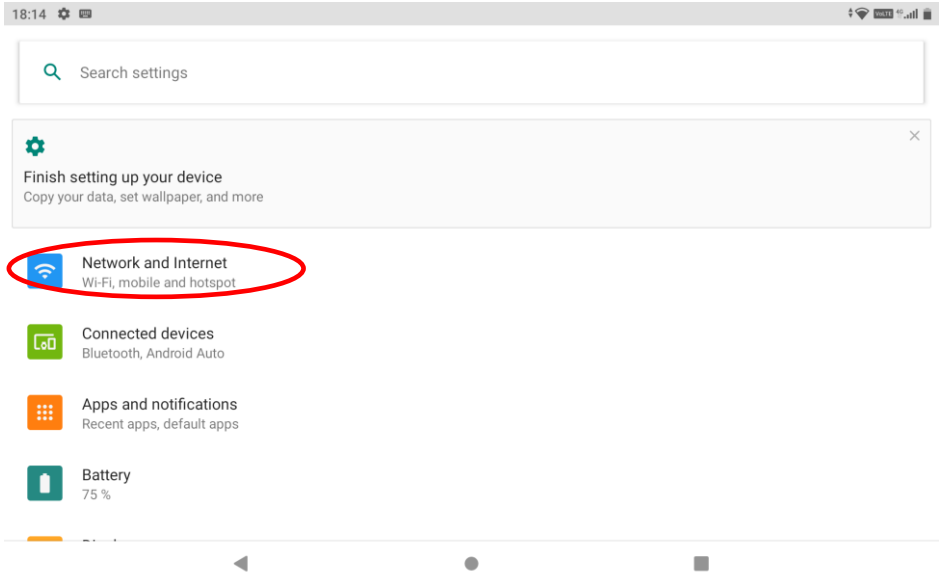

3. Tap on “Wi-Fi”.

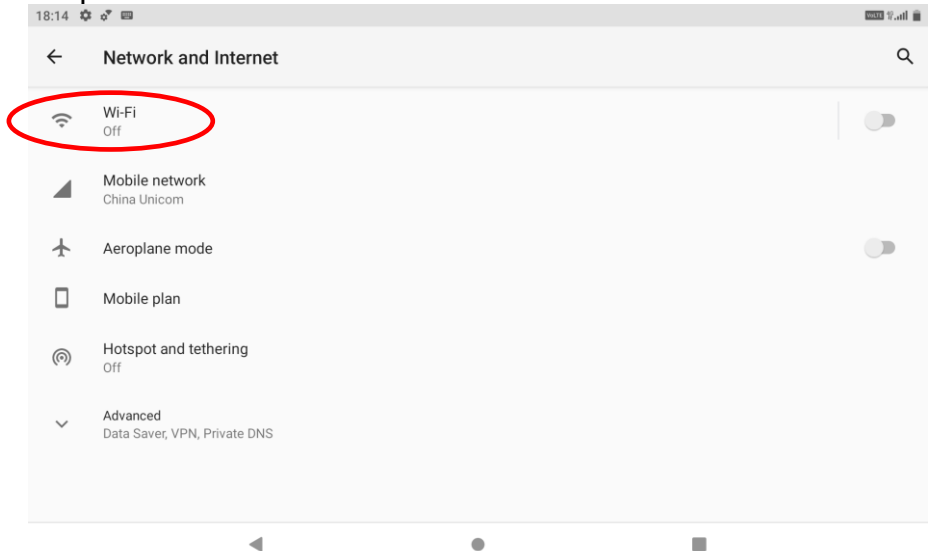

4. Activate the function by tapping on “Off”, if necessary. “Wi-Fi on” is displayed.

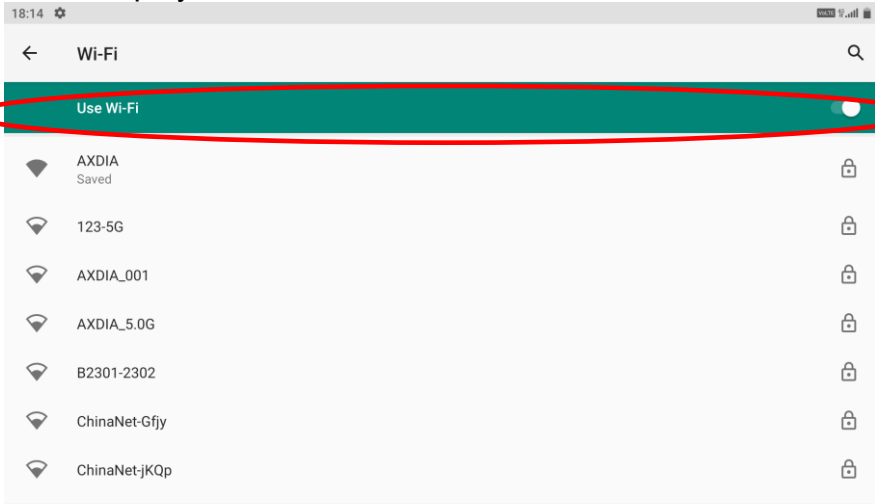

5. Your device automatically scans and displays available wireless networks. The list of available networks shows all wireless networks within range of your device.




Please note

The available network list is constantly refreshed automatically. When the Wi-Fi is enabled, your Tablet will connect automatically to your configured networks when they are in range.

If your Tablet finds a network that has never been configured, it will display a notification icon.


6. Tap on the network you want to connect to, enter the required network information (password) and then tap on “Connect”. Your Tablet will now attempt to establish a connection to that Wi-Fi hot spot with the network parameters you entered. If the connection is successful, the message “Connected to XXX” will appear under the Wi-Fi setting.

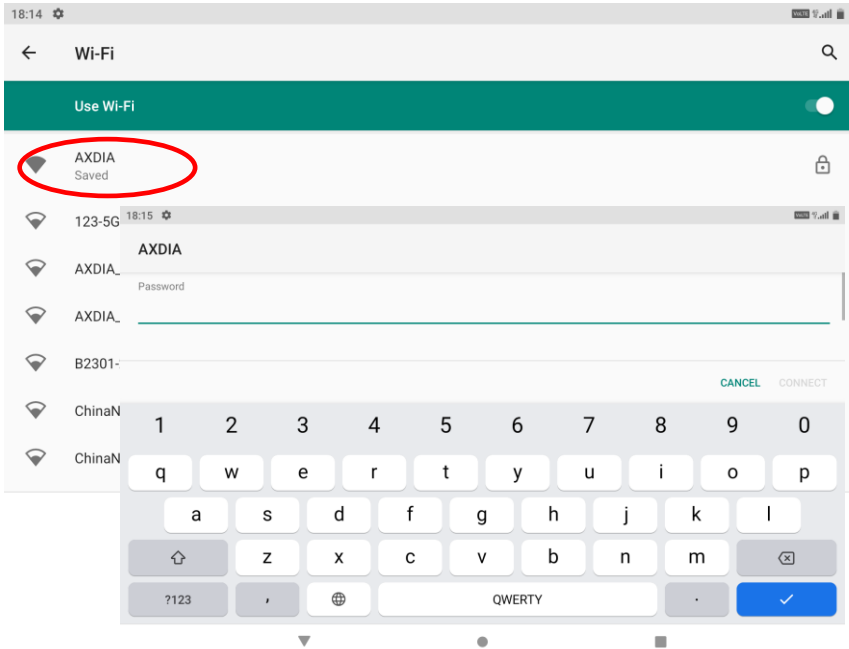

Advanced Connection

To access the advanced network parameters (“Network usage”, “IP Address”, etc.), tap on the connected WLAN connection and then on “Advanced” below. Additional parameters will be displayed.

Launching the Web browser

Tap the applications icon to display all applications, and then tap the browser icon  to launch the web browser. If you are already connected to a network, the Web browser will simply open and you can start browsing the Web.




Please note

Not all wireless networks offer access to the Internet. Some Wi-Fi networks only link several computers together, without any Internet connection.

Virtual Keyboard

Tapping on any text input field opens the virtual keyboard. Enter a website address or any required text with the virtual keyboard.

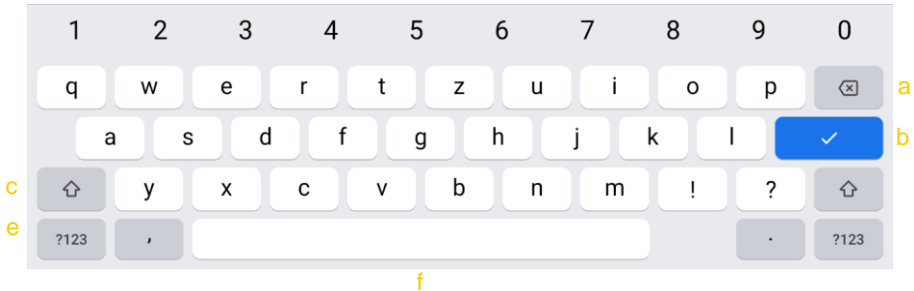


- a. Back-space
- b. OK / Enter Tabulator
- c. Shift
- d. Shift
- e. Switch between Numbers and Characters
- f. Space bar

Special character

Some of the keys provide the possibility to enter special character.

- Press the corresponding key and keep pressing.
- While pressing move your finger to the desired character.
- Release to write the selected symbol.

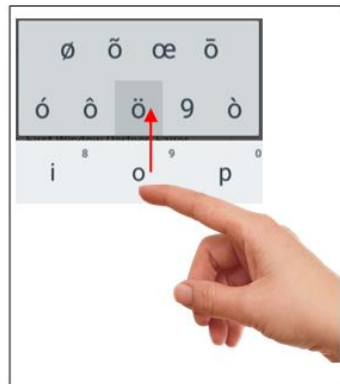

Select Input Method


Open the keyboard settings and select the input method if more than one input method is installed.







Please note

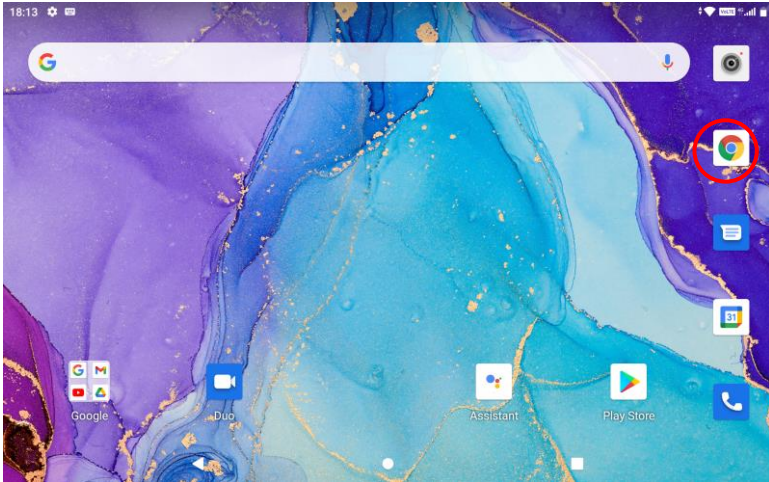
The keyboard layout changes according to OSD language settings.

Using the Web Browser



- Tap the browser icon  to launch the web browser.
- You can scroll the screen up and down by tapping on the page and dragging it up or down (be careful not to tap a link until you are ready!).
- To open a link, simply tap it.
- You can open several web pages at a time, view them all at once on the screen, and then tap one of them to view it in full screen.
- To go back to the previous page that you browsed, tap the Back icon .
- To display the available menu items, tap the Menu icon .
- To go back directly to the Home screen, tap the Home icon .
- Depending on where you are in the web browser, holding down on an item will give you access to more options.
- To fill in a text field, tap in the field, then use the virtual keyboard to type in the required text.
- You can tap on the screen to enlarge or diminish the page.

Web browser options

While a Web page is prompted press the menu key  at the top right corner, to open the browser settings.

New tab	Opens a new tab.	
New incognito tab	Opens a new tab that will not be saved in the history. No cookies will be created.	
History	Lists the last visited internet pages	
Downloads	Gives an overview about all downloaded files.	
Bookmarks	Edit your bookmarks.	
Recent tabs	Lists the history of the last tabs.	
Share	Share the website .	
Translate	Translate the website.	
Add to Home screen	Add the website to the home screen-	
Desktop site	The website will be displayed like on a computer.	
Settings	<i>Basic settings</i>	
	Search engine	Selects the current search engine
	Passwords	Saved passwords
	Payment methods	To manage form data.
	Addresses and more	Save and fill addresses
	Privacy and security	Privacy and security settings
	Safety check	Safe from data breaches, unsafe websites etc..
	Notifications	All chrome notifications settings
	Theme	Background screen theme
	<i>Advanced</i>	
	Homepage	On / Off

	Accessibility	Modify text size etc.
	Site settings	Edit access privileges of a website
	Languages	Changes the language of the web browser.
	Lite mode	Saves internet data when active.
	Downloads	Downloads settings
	About Chrome	Information's about Chrome
Help and Feedback	Support and feedback for the web browser.	


Photo Playback

Tap on the app icon to access all apps and tap on the photo icon to launch the photo folder.

Thumbnails


The first screen in photo mode shows all photos/videos and sub folders in the device or on memory card as thumbnails.

Tap on a photo thumbnail to view the photo in full screen mode. Open the sub folder if the photo is stored in a sub folder to display the photo/video contents as thumbnails.

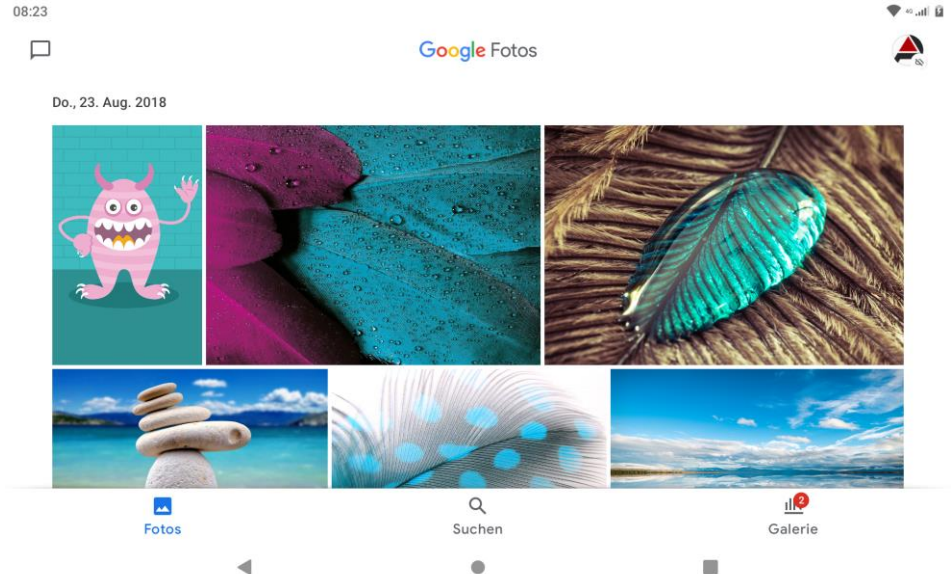

View Photo

Back to
previous
view

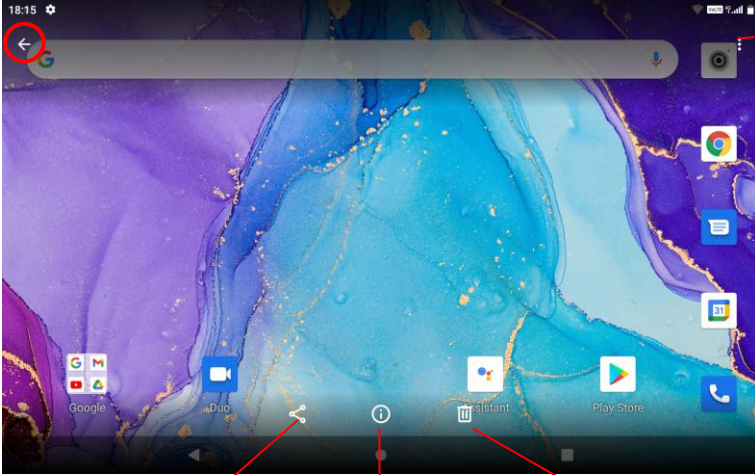




Menu

Share image

Image Information

Erase image

While viewing photos tap on the screen to show the status bar at top and bottom.

- Press the menu button or tap on the respective icon (☰) in the top right corner and then on “Slideshow” to start the slideshow.
- Tap on the screen again to end the slide show.
- Wipe with your finger to the left or right over the image to display the previous/next photo.
- To zoom in  or out  tap with two fingers on the display and pinch the image between thumb and pointer finger.
- Tap on Image information symbol, to show image details.
- Tap on  and then on “Use as” to use the image as wallpaper or contact image.

Manage Third-party Applications

Your tablet provides support to many useful third-party applications. You can purchase the applications to add more functions to your device. They are available online at the Internet or directly on your product.

Pre-installed Applications

The device has pre-installed applications when it was manufactured. You can see them by tapping **Application Tab**. They are video player, audio player, photo browser, calculator etc.

Install Applications

You can install applications manually following these steps:

- (1) Download the installation file to your computer. Make sure the file is in format of .apk which is supported by your Tablet system.
- (2) Connect your Tablet to computer with the USB cable.
- (3) Copy the installation file to your Tablet.
- (4) Disconnect your Tablet from the computer.
- (5) Turn on your Tablet and enter the file explorer mode with the Explorer.
- (6) Locate the installation file and open it.
- (7) Follow the on-screen instructions to install the application.
- (8) Once the application is installed successfully, you can find it in the application tab.

Uninstall Applications

- (1) Tap the home screen and drag from the bottom to the top and open "Settings".
- (2) Select "Apps and notifications" and "See all Apps".
- (3) Tap on the application that you want to uninstall.
- (4) Tap on "Uninstall" to uninstall the application.

**Please note**

You cannot uninstall the pre-installed applications. Some of the applications developed for mobile phones might not run properly in the Tablet. Please consult the respective software developer for further information or support.

Installed on this unit are various third-party applications (Apps), whose author is not Axdia.

All rights and obligations remain the sole responsibility of the author of these applications.

Axdia accepts no liability for any malfunction of third-party apps.

For support or license inquiries please contact the respective owners directly.



Contact information may usually be found within the application.

**Caution**

Please note that the installation of third-party application occurs on your own risk! Any up normal behavior or damage that is caused by installing third-party applications will not be an integral part of the warranty.

System Settings

Tap on the Home screen, drag from the bottom to the top and open "Settings".

- Tap on the function to change the settings.
- Wipe with your finger over the screen to display further settings outside the screen.
- After completing your settings tap on the  icon to return to the setting menu or tap on the  icon to return to the Home screen. Your changes are saved.

Networks and Internet

Wi-Fi	Tap to enable/disable the Wi-Fi connection. Now select your WiFi-connection and enter the password.
Aeroplane mode	Aeroplane mode On / Off.
Hotspot & tethering	To share the internet connection with other devices.
Data Saver	Data Saver On / Off.
VPN	Create a VPN connection.
Private DNS	Enable or disable encrypted transmission of a DNS request.

Connected devices

Wirelessly pair your device with other devices via Bluetooth or to press or stream content. First select the desired connection setting, then tap "Pair new device".

Apps and notifications

See all XX Apps	An overview of all installed apps. You can also uninstall or disable your apps here.
Notifications	Detailed settings for notifications
Screen time	An overview of the usage time of the apps.
Default apps	To define the default app for the main system services.
Permission manager	Settings for the access rights to all system components.
Wireless emergency calls	Wireless emergency calls settings
Special app access	Settings for the access rights to all system functions.

Battery

Consumption and runtime display and power management settings.

Display

Brightness level	Adjust the brightness of the screen.
Dark theme	Dark theme On / Off
Night Light	Night Light On / Off
Colors & contrast	Colors and contrast settings.
Adaptive brightness	Adaptive brightness settings.
Wallpaper	For selecting the background wallpaper.
Screen timeout	Selecting the time for screen timeout.
Auto-rotate screen	Activate / deactivate auto screen rotating.
Font size	To change the font size in the menus.
Display size	To change the display size of items.
Screen saver	Set up screensaver.
Lock screen	Lock screen settings

Scheduled power on/off

Settings for power on and power off of the device.

Sound

Settings for sounds and their volume for various functions and actions.

Storage

Management of the internal memory and an optional inserted Micro SD memory card.

Privacy

Privacy settings.

Location

Location settings. You can set up, which App has the permission to your location.

Security

Manage the security of your device, such as screen lock, face unlock etc.

Accounts

Settings to create and sync with different accounts, such as email and Google and to create and manage user profiles.

Accessibility

Configuration of accessibility. These include speech output, text and display customizations and device behavior for some features.

Smart controls

Settings of Smart controls.

Digital Wellbeing and parental controls

Control and restrict the usage behavior of your device. The parental controls settings help to manage the content and other restrictions, as well as control the usage time of your child.

Google

To manage and use Google services and settings.

System

Languages & input	For setting the system language and the behavior of the keyboard.
Gestures	key settings
Date & Time	Here you set the date, time, time zone and time format.
Backup	Configure backup from an existing Google Account.
Navigation bar	Navigation bar settings
Reset options	Reset functions and the complete device.
Multiple users	Here you can add more users.
System update	Check for system update.

About phone

Information's about the device.

Troubleshooting

Touch screen does not respond

- Ensure that the app provides full touch screen support.
- Do not tap too hard on the screen; this can cause malfunctions.

No sound from earphones

- Ensure that the volume setting is not too low and that the connection is ok.
- Ensure that the earphones are clean. Corrupted MP3 files can cause different noise or cannot be played.
- Ensure that the files are not damaged. Try different earphones.
- Ensure that the Wi-Fi function is enabled and that a wireless network is within range.

Characters are corrupted

Ensure that the language is set properly.

No Wi-Fi connection

- Ensure that the Wi-Fi function is enabled and that a wireless network is within range.
- Enter the correct password. Observe special characters and case sensitivity. Characters must be entered accordingly.
- Follow the hints on the next page.

Solve Wi-Fi connection problems

1. Open Wi-Fi settings.
2. Select and remove Wi-Fi.
3. Tick “Display Password” and enter password.
4. Look out for status messages below the network name:

Problem	Status messages (below network name in Wi-Fi settings)	Possible cause	Solution
Network not found	Network not found	<ul style="list-style-type: none"> - SSID not visible - Wi-Fi too weak 	<ul style="list-style-type: none"> - Enable SSID in router configuration - Decrease distance to router - Firmware update or change channel
No Internet	<ul style="list-style-type: none"> -> Connecting -> Not connected 	<ul style="list-style-type: none"> - MAC filter active 	<ul style="list-style-type: none"> - Deactivate filter in router configuration
No Internet	<ul style="list-style-type: none"> -> Connecting -> Authentication... -> Not connected 	<ul style="list-style-type: none"> - Password wrong or wrong spelling 	<ul style="list-style-type: none"> - Check and re-enter password
No Internet	<ul style="list-style-type: none"> -> Connecting -> Authentication... -> Retrieving IP address... -> Not connected 	<ul style="list-style-type: none"> - Router configuration faulty or - Wi-Fi too weak - DHCP server off 	<ul style="list-style-type: none"> - Delete list of connected devices on router - Decrease distance to router - Activate DHCP in router configuration

No USB connection is established to the PC

Check cable/plug connection to the PC, Windows system configuration and USB driver. Restart PC, remove and reconnect the USB cable, reinstall drivers.

It is not possible to store anything at the inserted SD card

Please confirm that the inserted SD card is not write protected.

It is not possible to download e-books from odysbook.de.

Please disable any popup blocker.

Specifications

Configurations	
CPU	1,6GHz 64-bit Octa Core
DDR	4GB DDRIII Ram
Built-in operating system	Android 11
Hardware	IBM PC or compatible PC, Notebook or Macintosh with USB port
Internal Memory	64GB Flash Storage
Memory Card	Micro SD card: up to 256GB(SDHC)
System Requirements	
Operation System	Windows 7 and above MAC OS 10.4 or above
USB Interface	USB2.0 High speed
Features	
Output Port	3.5mm earphone port, built-in speaker
	Built in microphone
E-book Format	EPUB, PDF
Audio	MP3 (MPEG1/2/2.5 Audio Layer 1/2/3); WAV (MS-ADPCM, IMA-ADPCM, PCM)
Video Format	AVI (Xvid, Divx 4/5/6 except GMC&QPEL, Divx for License, Audio Codec: MP3, AC3) MKV (H.264, MPEG4, XVID, DIVX4/5/6) MOV (MPEG4, H.264, Audio Codec:MP3) 3GP/MP4(H.264/H.263/MPEG4/XVID/DI VX4/5/6)
Photo Format	JPEG, BMP, GIF(static), PNG
Language	Multinational languages

Technical Parameter	
Audio Bit Rate	MP3: 8~320Kbps OGG: 16~320 Kbit/s WAV: 8~48 kHz
Video Resolution	AVI (Max.2160p); MP4 (Max. 2160p) MKV (Max. 2160p); MOV (Max. 1280x720)
Video Bit rate	Max. 6Mbps (MPEG4, XVID, DIVX4/5/6); Max. 2.5Mbps (H.264, Real video 8/9/10); Max. 2Mbps (Sensors H.263).
Photo Resolution	JPEG (Baseline) (Max.8000*8000), GIF(Static) (Max.1000*1000)
Network Connection Media	2,4 / 5GHz WLAN (802.11 ac/a/b/g/n) Bluetooth 5.0 GSM: B2/3/5/8, WCDMA: B1/2/5/8 FDD-LTE:B1/2/3//4/5//7/8/12/17/20/28 TDD-LTE: B40
Battery Charge Time	About 5 Hours
Battery Life	About 4 hours
Display	10.1" HD IPS LED, Touchpad (capacitive touch pad), 1200 x 1920 pixels.
SNR	65dB above
Frequency Response Range	20Hz—20KHz
Power Supply	Rechargeable lithium-ion polymer battery; AC Adapter: AC Input 100-240V~ 50/60Hz, DC Output 5V/2A via USB
Physical Parameters	

Storage Temp.	-20°C ~ +65°C
Ambient Temp.	0°C ~ +50°C
Operation Relative Humidity	20% ~ 90% (40°C)
Storage Relative Humidity	20% ~ 93% (40°C)

Google, Android, Google Play and other marks are trademarks of Google LLC.
Oreo is a trademark of Mondelez International, Inc. group.

Maximum transmission power

Function	Channel	Frequency (MHz)	Output power (dBm)	Output power (mW)
Bluetooth	0	2402	5,1	3,23
802.11b Wi-Fi	1	2412	16,1	40,73
802.11n (HT40)	3	2422	13,2	20,89
802.11b Wi-Fi	7	2442	16,4	43,65
802.11n (HT40)	11	2462	13	19,95
802.11b Wi-Fi	13	2472	16	39,81
Bluetooth	39	2441	4,4	2,754
Bluetooth	78	2480	4,1	2,57
802.11ac	42	5210	12,1	16,2
802.11ac	157	5785	12,2	16,59
GSM 900	975	880,2	/	/
GSM 900	60	902	32,5	1778,2
GSM 900	124	914,8	32,5	1778
DCS 1800	513	1710,4	29,6	912
DCS 1800	700	1747,8	29,8	954,99
DCS 1800	884	1784,6	29,5	891
WCDMA	2937	880,2	22	158,48
WCDMA	3012	902	22	158,48
WCDMA	3088	914,8	22	158,48
WCDMA	10562	1920	22	158,48

License conditions

Copyright (c) 2013 AXDIA International GmbH

License terms of AXDIA International GmbH, hereinafter referred to as AXDIA:

The firmware packages provided by AXDIA contain files that are made available under various licenses, especially one or various open source licenses (GNU General Public License, GNU Lesser General Public License, or FreeBSD License). AXDIA grants you the right to use the firmware packages, which are made available as object code format. The licensee may make copies of the firmware only for the purpose of backup (backup copy). You can request the source code of files provided as open source under info@axdia.de. The firmware package may not be reproduced, redistributed, or be made publicly available in any other way, or be decompiled, disassembled, translated, or edited in any way and then made public, without the prior written consent of AXDIA.

The Software and documentation have been created with great care and verified for correctness according to the current state of the art. AXDIA assumes, neither explicit nor implied, the representation or responsibility for the performance, quality, and marketability of the product for any purpose, which deviates from the performance specifications contained in the product description. The licensee bears all risk concerning hazards and loss of quality, which may arise in the use of the product. AXDIA is responsible only in case of gross negligence or intent for damages arising directly or indirectly from the use of the software or documentation, and for incidental consequential loss or damages. All warranty claims are expressly excluded for loss or damage to hardware or software or data as a result of direct or indirect errors or destruction and for any costs which are related to the documentation or the software and are due to improper installation, not performed by AXDIA.

Warranty Conditions

The following conditions comprise the requirements and scope of our warranty conditions and do not affect our legal and contractual warranty obligations.

We offer a warranty on our products in accordance with the following conditions:

1. We will resolve damages or defects on our products free of charge within 12 months of the purchase date under the following warranty conditions. For any damage or defect determined later than 12 months after the purchase date, proof of a manufacturing fault must be submitted for repair under warranty.

The warranty does not cover batteries, rechargeable batteries and other parts, which are considered consumables, parts that break easily such as glass or plastic or defects based on normal wear and tear. There is no warranty obligation in the event of marginal differences compared to the target appearance and workmanship provided these have a negligible effect on the products fitness for use, in the event of damage caused by chemical or electrochemical effects, by water or generally from abnormal conditions. Damage that is brought about by disregard of the user manual or other improper handling, unauthorized interventions in the installed system or the installation of additional software, is also excluded.

2. The warranty will be performed in such a way that we shall decide whether to repair the defective parts or to replace them with working parts free of charge. AXDIA reserves the right to exchange the product for a replacement product of equal value if the product that is sent in cannot be repaired within a reasonable time or at reasonable cost. The product can also be exchanged for a different model of the same value. Requests cannot be made for repairs to be carried out on site. Parts that have been replaced or exchanged become our property.

3. The warranty claim does not apply if repairs or other work is carried out by unauthorized persons or if our products are equipped with additional parts or accessories that are not approved for our products.
4. Warranties that have been activated do not cause the warranty period to be extended, nor do they trigger a new warranty period. The warranty period for any replacement parts installed ends with the warranty period for the entire product.
5. Any other or further claims are excluded, especially those for replacement due to damage caused outside of the product, provided there is no obligatory legal liability. We therefore accept no liability for accidental, indirect or other consequential damage of any kind, which leads to usage restrictions, data loss, loss of earnings or interruption to business.
6. If the device has built-in data storage, the customer is responsible for backing up the data before sending back the device. Axdia is not liable for data loss from clients' devices that are sent in. Axdia reserves the right to restore the factory settings on devices that are sent in. Please therefore make a note of your personal settings where appropriate.
7. This warranty does not affect your legal warranty rights and is subject to the laws of the country in which the first purchase of the product was made by the end-user.

Asserting a warranty claim

1. To make use of the warranty service, you must contact the AXDIA Service Center by e-mail, fax or phone (support@axdia.de). You can also use the service form on our website or on the back of the warranty conditions.
2. AXDIA Service Center will try to diagnose and solve your problem. If it is determined that a warranty claim exists, you will be given an RMA number (Return Material Authorization) and you will be asked to send the product to AXDIA.

IMPORTANT:

Unfortunately the guarantee is not valid unless a proof of purchase is presented!

AXDIA will only accept parcels that have an RMA number.

Please observe the following when sending the product:

1. The shipment should be sent in with sufficient postage and insurance and suitable for transport. The original accessories, such as USB cable and mains adaptor for example, must be enclosed with the product unless otherwise specified by the AXDIA Service Centre.
2. Mark the RMA number on the outside of the package in such a way that it is visible and clearly legible.
3. You must enclose a copy of the sales slip as proof of purchase.
4. Once AXDIA has received the product, it will meet its warranty obligations in accordance with the warranty conditions and will return the product to the sender with carriage and insurance paid.

Service outside of warranty

AXDIA can refuse any service claim made that is not covered by the warranty. If AXDIA agrees to provide a service outside the warranty, the customer will be invoiced for all repair and transport costs.

AXDIA will not accept any packages that have not first been approved by AXDIA by means of an RMA (Return Material Authorization).

